
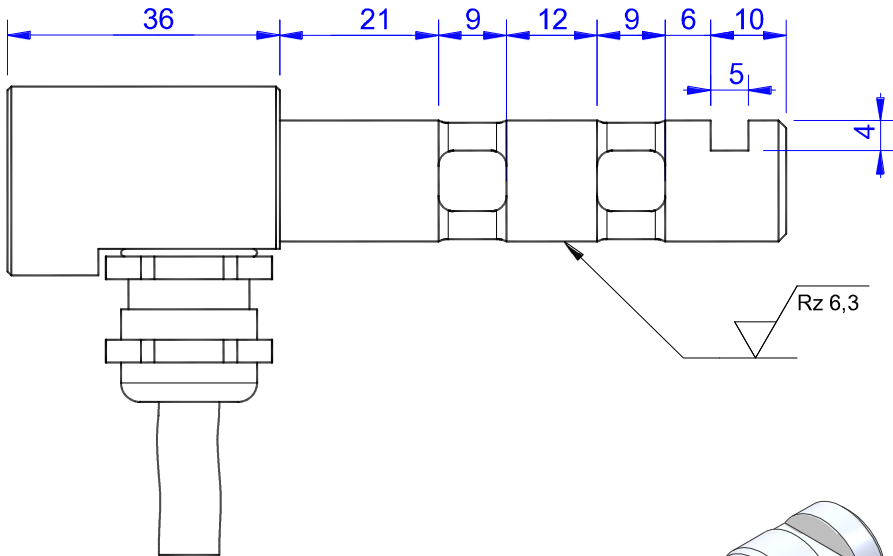



MB1682

Load Pin

Content of Loadpin Datasheet
Page 1 ... General
Page 2 ... Mounting Situation
Page 3 ... Output Signal & Wiring

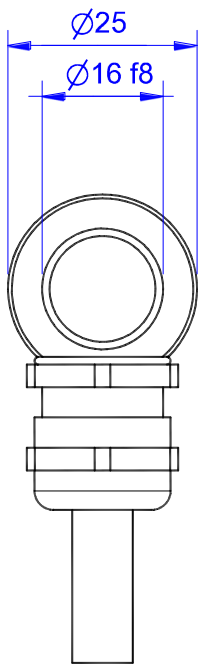

Marking:
Loadpin: MBx
Orderno.: MBx-xxx-x-x
Serialno.: xxxxxxxx
www.batarow.com
Made in Germany

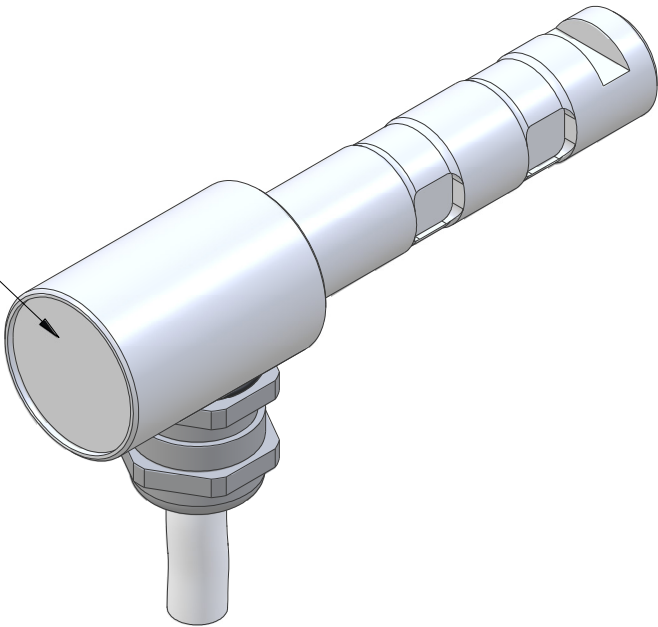


Ordernumber	Capacity [kN] (F.S.)	Uncertainty [kN] (k=2)	Review
MB1682-2-x-B	2	± 0,010	B
MB1682-5-x-B	5	± 0,025	B
MB1682-10-x-B	10	± 0,050	B
MB1682-16-x-B*	16	± 0,080	B
MB1682-20-x-B	20	± 0,100	B

* above showed version
fixed dimensions don't change at other capacity

Specifications:

Dimension / Material		
Material		Stainless Steel
Protection class		IP 66
Hardness (load area)	HRC	40..45
Mechanical Data		
Safe Load Limit	% of F.S.	150
Breaking Load	% of F.S.	300
Precision		
Nonlinearity	% of F.S.	±0,5
Nonrepeatability	% of F.S.	±0,25
Hysteresis	% of F.S.	±0,2
Temp. Shift Zero	% of F.S./K.	±0,05
Temp. Shift Span	% of F.S./K.	±0,05
Temperature		
Compensated Temp.	°C	-10...+60
Operating Temp.	°C	-20...+70

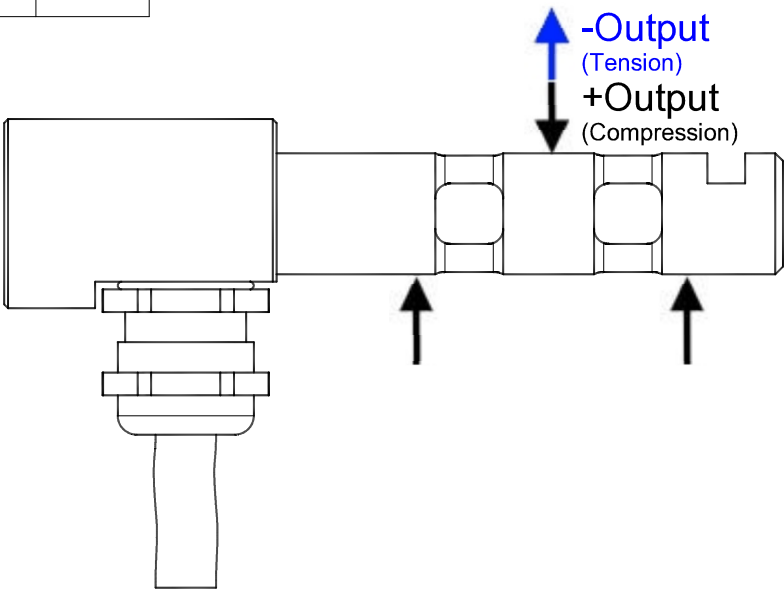

Batarow
Made in Germany

Batarow Sensorik GmbH
Gewerbegebiet 4
18276 Lüssow OT Karow

Mail:info@batarow.com
Phone: ...+49 (0) 3843-855555
Fax:+49 (0) 3843-855556

Internet:
www.batarow.com

Mounting Situation



MB1682 Review: B

Bore fit of mounting situation: H7

Configuration

possible mounting situation / customer mounting could vary

(Please describe mounting situation with Vs, Ws, Xs, Ys and Zs for best possible calibration)

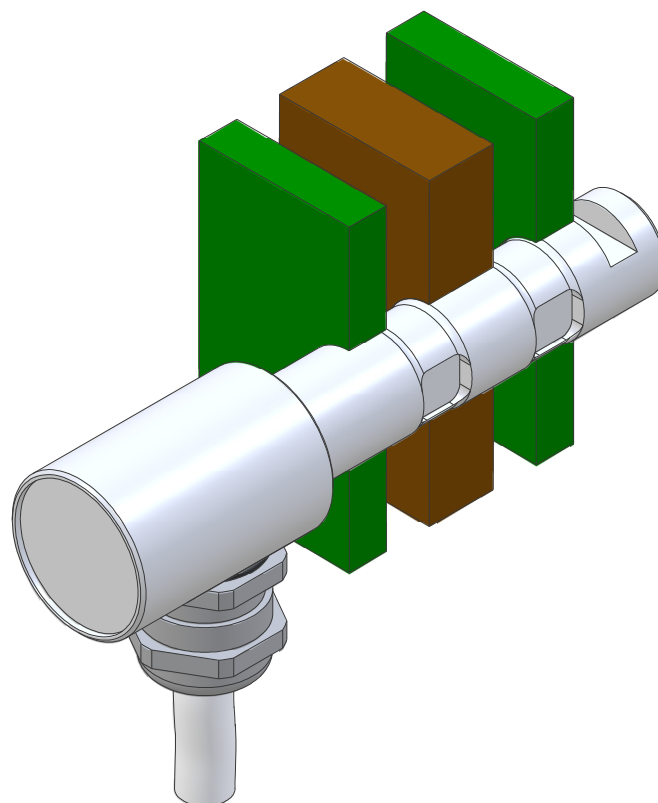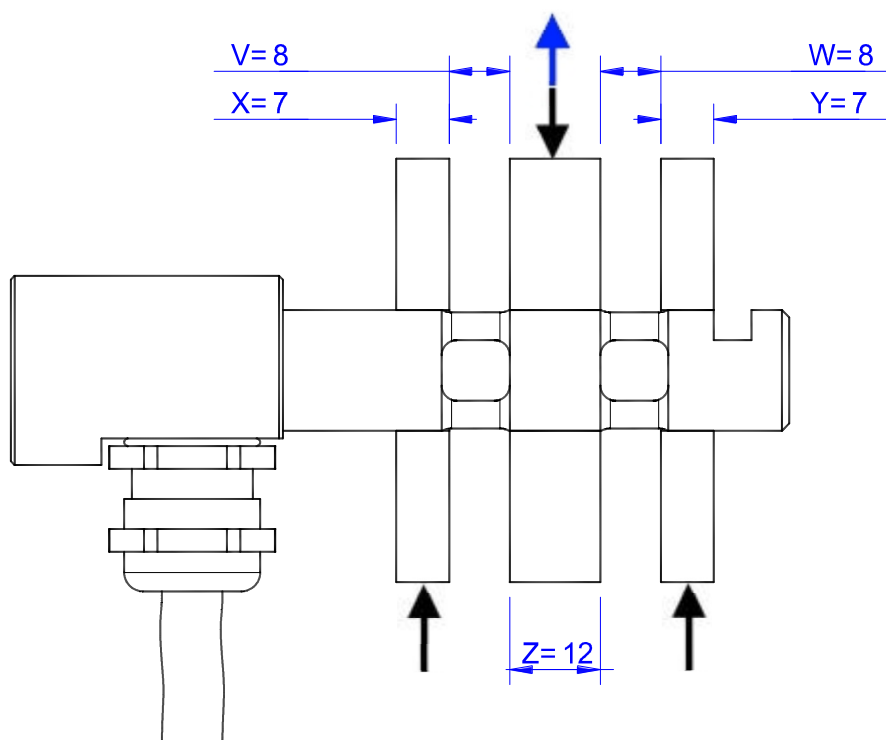

Output Signal & Wiring

MB1682 Review: B

Analog Output mV/V (S1)

Electrical Data		
Rated Output	mV/V@F.S.	1
Zero Balance	mV/V	±0,05
Excitation (Maximum)	Volt	10
Input Resistance	Ohm	450±100
Output Resistance	Ohm	352±2
Insulating Resistance	GOhm	>5

Wiringcode: WC52		Cabletype: 4x0,14xLapp FD		
Cable Length	Excitation (+)	Excitation (-)	Bridge (+)	Bridge (-)
3 m	brown	white	green	yellow

Ordernumber Add-On:
MBxxx-x-S1-x

Analog Output 0V..10V (U1)*

Electrical Data U1		
Output @ 0kN	V	0
Output @ F.S.	V	10
Supply Voltage	V	14..28
Current Consumption	mA	25 (@ 24V)
Bandwidth	kHz	1

Wiringcode: WC514				
Integrated Amplifier GSV				
Cabeling: 3 m 5x0,14 Unitronic FD CP Plus				
Supply(+)	GND Supply	Output	Tare	Scale
brown	white	green	yellow	gray

Ordernumber Add-On:
MBxxx-x-U1-x

Analog Output 4..20mA (I1)*

Electrical Data I1		
Output @ 0kN	mA	4
Output @ F.S.	mA	20
Supply Voltage	V	14..28
Current Consumption	mA	45 (@ 24V)
Bandwidth	kHz	1

Wiringcode: WC514				
Integrated Amplifier GSV				
Cabeling: 3 m 5x0,14 Unitronic FD CP Plus				
Supply(+)	GND Supply	Output	Tare	Scale
brown	white	green	yellow	gray

Ordernumber Add-On:
MBxxx-x-I1-x

Analog Output 0V..5V..10V (U4)

Electrical Data U4		
Output @ -F.S.	V	0
Output @ 0kN	V	5
Output @ +F.S.	V	10
Supply Voltage	V	14..28
Current Consumption	mA	25 (@ 24V)
Bandwidth	kHz	1

Wiringcode: WC514				
Integrated Amplifier GSV				
Cabeling: 5 m 5x0,14 Unitronic FD CP Plus				
Supply(+)	GND Supply	Output	Tare	Scale
brown	white	green	yellow	gray

Ordernumber Add-On:
MBxxx-x-U4-x

Attention: Nipple orientation of connector is not fixed. In case of 90° connector - it is necessary to set by customer.

*Attention: With this output configuration is no negative signal (Tension) possible. Please ask our engineering for 4..12..20mA; 1..5..9V or ±10V versions.

Batarow
Made in Germany

Batarow Sensorik GmbH
Gewerbegebiet 4
18276 Lüssow OT Karow

Mail:info@batarow.com
Phone:+49 (0) 3843-855555
Fax:+49 (0) 3843-855556

Internet:
www.batarow.com